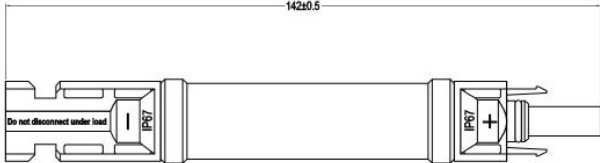
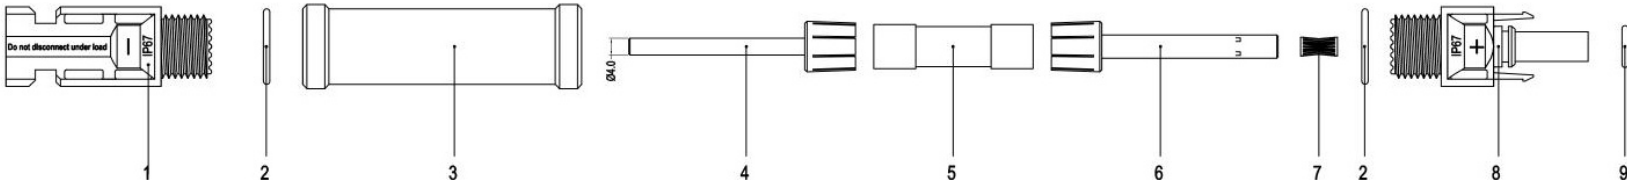








MC4 In-line Fuse 1000V																																																															
																																																															
																																																															
10x38mm In-line Fuse																																																															
<table><tr><td>Insulation material</td><td>PP0</td></tr><tr><td>Rated current</td><td>30A</td></tr><tr><td>Current range of in-line fuse</td><td>8A,10A,12A,15A,20A,25A,30A</td></tr><tr><td>Rated voltage</td><td>1000V(TUV) 600V(UL)</td></tr><tr><td>Contact resistance</td><td><1mΩ</td></tr><tr><td>Contact material</td><td>Copper, Tin plated</td></tr><tr><td>Degree of protection</td><td>IP67</td></tr><tr><td>Safety class</td><td>II</td></tr><tr><td>Flame class</td><td>UL94-V0</td></tr><tr><td>Insertion force</td><td>Max. 50N</td></tr><tr><td>Withdrawal force</td><td>Min. 50N</td></tr><tr><td>Ambient temperature range</td><td>-40°C...+90°C(IEC)</td></tr><tr><td>Size of in-line fuse</td><td>10x38mm</td></tr></table>														Insulation material	PP0	Rated current	30A	Current range of in-line fuse	8A,10A,12A,15A,20A,25A,30A	Rated voltage	1000V(TUV) 600V(UL)	Contact resistance	<1mΩ	Contact material	Copper, Tin plated	Degree of protection	IP67	Safety class	II	Flame class	UL94-V0	Insertion force	Max. 50N	Withdrawal force	Min. 50N	Ambient temperature range	-40°C...+90°C(IEC)	Size of in-line fuse	10x38mm																								
Insulation material	PP0																																																														
Rated current	30A																																																														
Current range of in-line fuse	8A,10A,12A,15A,20A,25A,30A																																																														
Rated voltage	1000V(TUV) 600V(UL)																																																														
Contact resistance	<1mΩ																																																														
Contact material	Copper, Tin plated																																																														
Degree of protection	IP67																																																														
Safety class	II																																																														
Flame class	UL94-V0																																																														
Insertion force	Max. 50N																																																														
Withdrawal force	Min. 50N																																																														
Ambient temperature range	-40°C...+90°C(IEC)																																																														
Size of in-line fuse	10x38mm																																																														
<table><tr><td></td><td></td><td></td><td></td><td>尺寸公差</td><td>角度公差</td><td>核准</td><td>2019.12.18</td><td>材质</td><td colspan="4" rowspan="2">Product Name MC4 PV Fuse holder</td><td colspan="2" rowspan="4"> RISIN ENERGY CO., LIMITED</td></tr><tr><td></td><td></td><td></td><td></td><td>X.0 ±0.25</td><td>X.0° ±1°</td><td>审核</td><td>2019.12.18</td><td>表面处理</td></tr><tr><td></td><td></td><td></td><td></td><td>0.X ±0.13</td><td>0.X° ±0.5°</td><td>设计</td><td>2019.12.18</td><td>角法</td><td colspan="2">比例</td><td></td></tr><tr><td>版本</td><td>修订日期</td><td>修订内容</td><td>修订人</td><td>0.0X ±0.05</td><td>0.0X° ±0.2°</td><td>绘图</td><td>2019.12.18</td><td>页次</td><td>1/1</td><td>单位</td><td>mm</td><td>专案编号</td><td>文件编号</td></tr></table>																		尺寸公差	角度公差	核准	2019.12.18	材质	Product Name MC4 PV Fuse holder				 RISIN ENERGY CO., LIMITED						X.0 ±0.25	X.0° ±1°	审核	2019.12.18	表面处理					0.X ±0.13	0.X° ±0.5°	设计	2019.12.18	角法	 比例			版本	修订日期	修订内容	修订人	0.0X ±0.05	0.0X° ±0.2°	绘图	2019.12.18	页次	1/1	单位	mm	专案编号	文件编号
				尺寸公差	角度公差	核准	2019.12.18	材质	Product Name MC4 PV Fuse holder				 RISIN ENERGY CO., LIMITED																																																		
				X.0 ±0.25	X.0° ±1°	审核	2019.12.18	表面处理																																																							
				0.X ±0.13	0.X° ±0.5°	设计	2019.12.18	角法	 比例																																																						
版本	修订日期	修订内容	修订人	0.0X ±0.05	0.0X° ±0.2°	绘图	2019.12.18	页次	1/1	单位	mm	专案编号			文件编号																																																
1		2		3		4		5		6		7																																																			